

# **Monitoring Air-Sea Exchange Processes Using the High Frequency Ambient Sound Field**

Jeffrey A. Nystuen  
Applied Physics Laboratory  
University of Washington  
1013 NE 40th Street  
Seattle, WA 98105

phone: (206) 543-1343 fax: (206) 543-6785 email: [nystuen@apl.washington.edu](mailto:nystuen@apl.washington.edu)

Award Number: N00014-96-1-0423

## **LONG-TERM GOALS**

The ambient sound field contains information about the processes generating the sound and the intervening media modifying the sound. This research seeks to demonstrate measurement of useful ocean surface processes using passive measurements of the high frequency underwater ambient sound field. This will allow passive monitoring of environmental conditions from simple and robust sensors, namely hydrophones. In turn, given environmental weather conditions, predictive Naval ocean ambient noise models will be improved. This technique introduces no acoustic disturbance to the environment, and is hence covert and poses no potential harm to marine mammals or other forms of life in the ocean.


The frequency range of interest is from 200 Hz to 50 kHz. In this frequency range, the dominant natural sources of sound are breaking wind waves and precipitation. The sound generated by these phenomena can be subsequently modified through attenuation by ambient bubbles. These features of the air-sea interface: breaking waves, precipitation and bubbles, are an important part of the exchange of momentum, heat, water and gas between the ocean and the atmosphere. Coupled air-sea models are currently the weakest of the numerical models needed to analyze and forecast environmental (weather) conditions. Modelers have identified the need for data, especially of wind and rain, to develop and verify these models. Acoustical inversion of the sound field should be able to provide these data, even in remote and difficult regions where more conventional measurements are unavailable.

## **OBJECTIVES**

Inversion of the underwater ambient sound field consists of two general components: identifying the source of the sound, and then quantifying it. Nystuen and Selsor (1997) showed the identification of four ocean surface conditions producing distinctive features in the sound spectrum. These are wind, drizzle, heavy rain and ambient bubbles present (Fig. 1). Once classification is obtained, there are several algorithms available to quantify wind speed (Vagle et al., 1990) and precipitation (Nystuen et al. 1993; 1996; 2001). These algorithms need to be evaluated under different environmental conditions and modified if necessary. One of the more exciting new directions of this research is the quantitative estimation of ambient bubble populations. Conditions generating detectable ambient bubbles include high winds alone (Farmer and Lemon, 1984), very heavy rainfall (Fig. 1) and rain in the presence of high wind. These passive acoustic void fraction estimates need to be documented. The

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>30 SEP 2001</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-2001 to 00-00-2001</b>	
4. TITLE AND SUBTITLE <b>Monitoring Air-Sea Exchange Processes Using the High Frequency Ambient Sound Field</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Applied Physics Laboratory, University of Washington,,1013 NE 40th Street,,Seattle,,WA, 98105</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>The ambient sound field contains information about the processes generating the sound and the intervening media modifying the sound. This research seeks to demonstrate measurement of useful ocean surface processes using passive measurements of the high frequency underwater ambient sound field. This will allow passive monitoring of environmental conditions from simple and robust sensors, namely hydrophones. In turn, given environmental weather conditions, predictive Naval ocean ambient noise models will be improved. This technique introduces no acoustic disturbance to the environment, and is hence covert and poses no potential harm to marine mammals or other forms of life in the ocean.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>8</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

presence of these bubbles suggest that periods of enhanced gas exchange can be detected using passive acoustics.

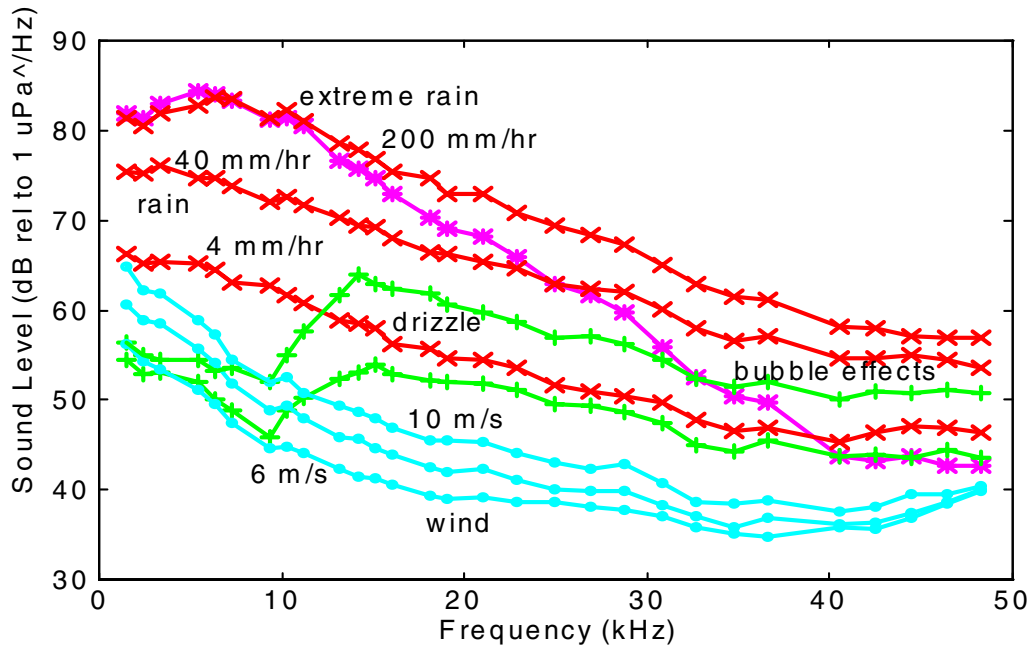


**Figure 1. Examples of oceanic sound spectra for wind, rain, drizzle and extreme rain (200 mm/hr) from the South China Sea. One of the spectra for extreme rain shows depressed high frequency (over 20 kHz) sound levels due to absorption by a sub-surface ambient bubble layer. It was recorded five minutes after the other extreme rain spectrum. This indicates that extreme rain is injecting bubbles into the ocean surface.**

## APPROACH

Multiple ocean ambient sound data sets have been obtained and the collection of new data sets is ongoing. Archived data sets include: OASIS (North Sea at 2000 m, Zedel et al. 1999), ASREX (North Atlantic, mid-winter), SCSMEX (South China Sea monsoon season, Lau, 1998), ANS Drifters (various locations worldwide) and MARS (Miami sheltered pond, rainfall). New data sets are being collected using Acoustic Rain Gauges (ARGs), designed and built at the Applied Physics Laboratory. ARGs are currently deployed on deep ocean moorings in the tropical Pacific Ocean warm pool region, the eastern Pacific ITZC and the stratus deck region near Peru. They have also been deployed in Crater Lake, Oregon (a deep freshwater lake) and in a coastal, shallow water location off the west coast of Florida. These data sets include various ancillary information, which will be used to verify the performance of the different acoustic inversion algorithms. A particular focus will be placed on rainfall detection, classification and quantification as the need for oceanic precipitation data is critical for many scientific studies of the structure and dynamics of the upper ocean.

## WORK COMPLETED


The MARS rainfall data set has been analyzed to document the potential and the limitations of the acoustical inversion to quantitatively measure raindrop size distribution within rain (Nystuen, 1999; 2001). The drifter data set has been analyzed to validate acoustic wind speed measurements and rainfall detection by comparison to passive microwave satellite data (Nystuen, 1997). The ASREX data set has been analyzed to produce a climatic-type rainfall record for the duration of the experiment and to provide rainfall rate data for process studies on the influence of rain on other air-sea exchange processes. The ASREX data also demonstrate the potential of using the ambient sound field to quantitatively estimate ambient bubble populations in the near-surface layer of the ocean. Three generations of acoustic rain gauges (ARGs) have been designed, built and deployed in a variety of oceanic situations. Data from the South China Sea Monsoon Experiment (SCSMEX) demonstrate acoustic detection of rainfall and the potential to classify rainfall type (Nystuen et al., 2000). Vandalism is a serious problem for surface instrumentation at sea. On several deployments, ARGs mounted underwater on the mooring line were undetected by vandals and were the only instruments to continue to provide data for the experiment after the attacks. The new generation ARGs are performing well and providing new data sets on a regular basis from various deployment situations.

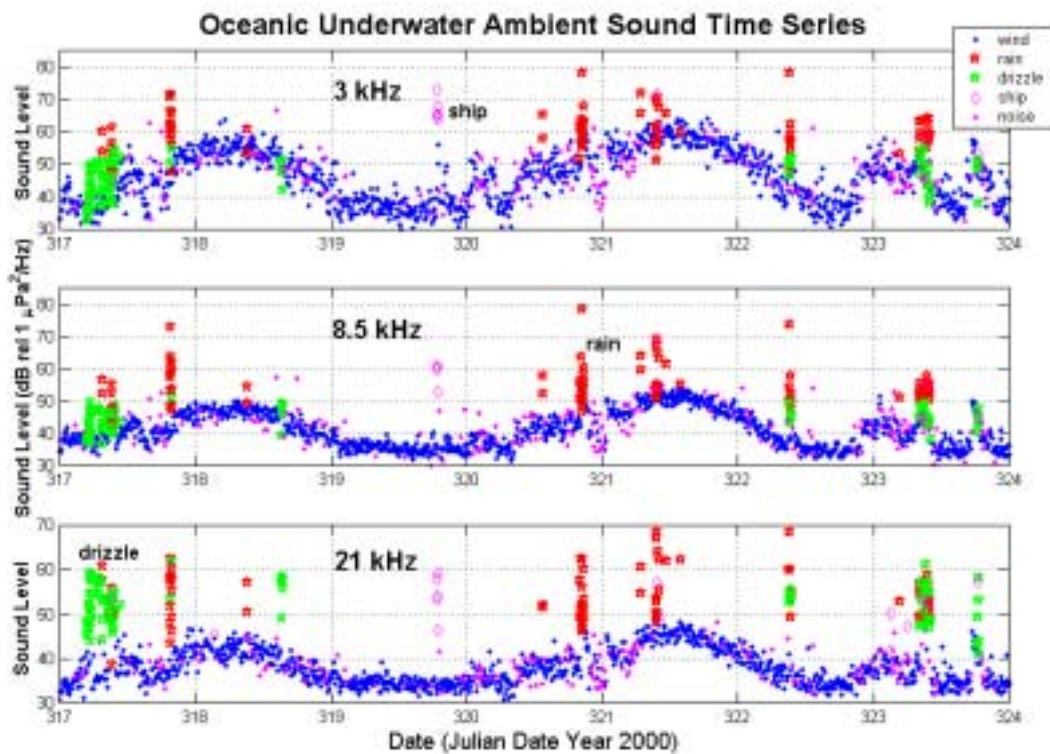

**Figure 2.** This figure shows time series of oceanic underwater sound at 3 different frequencies (3, 8.5 and 21 kHz) recorded from an Acoustical Rain Gauge (ARG) mounted on a deep ocean mooring at 40 meters depth. The mooring is part of the NOAA TAO array and is located at 10°N, 95°W. The different sources of sound are identified by comparing spectral intensity levels, spectral shapes and temporal variances of sound intensities.

## RESULTS

The first step in the analysis of oceanic ambient sound data is to identify the present surface weather conditions (wind, drizzle, heavy rain, ambient bubbles present) (Nystuen and Selsor, 1997). Figure 2 shows an example of the time series of the underwater sound levels at three different frequencies from an ARG mounted at 40 m depth on a deep ocean mooring at 10°N, 95°W. The sound sources are identified based on the spectral and temporal characteristics expected from rain, drizzle, wind and other noises such as ships. The geophysical interpretation of the acoustic data is shown in Figure 3 and compared with co-located mooring-mounted R.M. Young anemometer and rain gauge. The quantification of wind speed is excellent ( $\pm 0.4$  m/s), at least for wind speeds over 3 m/s. The acoustic wind speed measurement depends on the sound generated by breaking wind waves. For wind speeds below 3 m/s there is no acoustic signal as wave breaking is minimal. The co-detection of precipitation events is also excellent. The algorithm for rainfall quantification is still under development, but shows promise as seen in this figure.

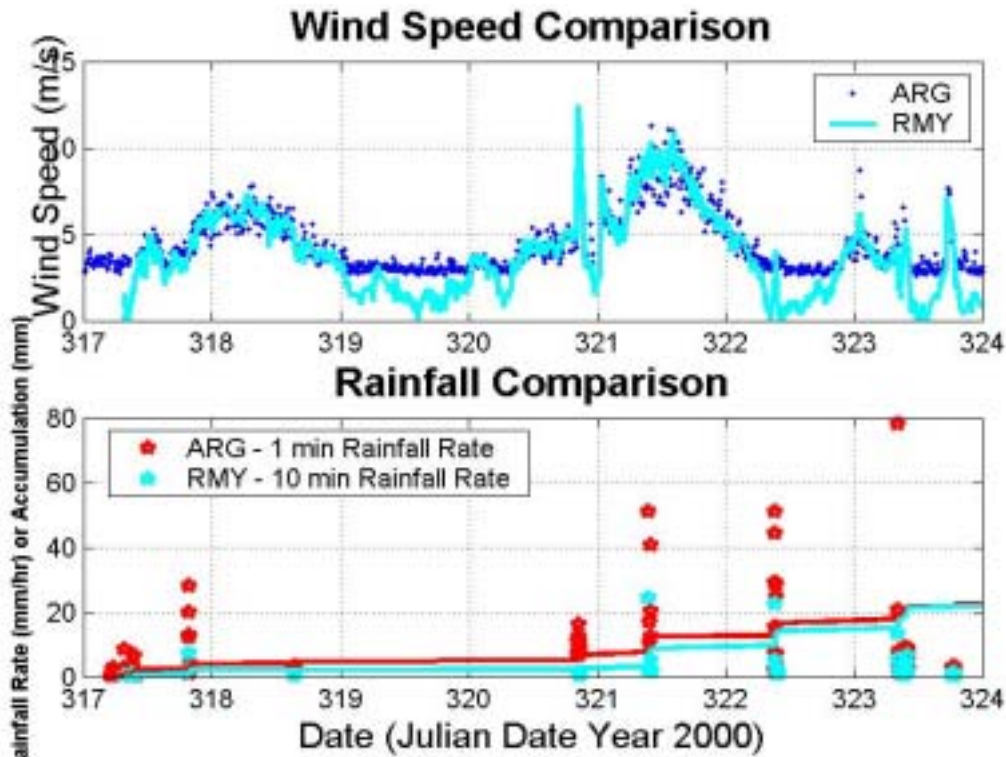

**Figure 3.** This figure shows the acoustic interpretation of the time series shown in Fig. 2. The acoustic wind speed measurement agrees with the RMY anemometer to  $\pm 0.4$  m/s for wind speeds greater than 3 m/s. The acoustic wind speed algorithm (Vagle et al. 1990) has a mathematical minimum of about 3 m/s. Co-detection of rain events from the ARG and RMY rain sensors is excellent. The ARG measures instantaneous rainfall rate, while the RMY rain gauge must be averaged over a finite time interval. In this case, 10 minutes is used to reduce instrumental error (Serra et al., 2000). Direct comparison between the instruments can be achieved using rainfall accumulation.

## **IMPACT/APPLICATIONS**

Analysis of the ambient sound field to provide important air-sea exchange measurements is a technology that should lead to important advances in our understanding of the physics of the air-sea interface. The measurement is simple, robust and covert. It can be made from small, autonomous drifters, or larger surface moorings. The measurements of wind, precipitation and bubbles are difficult to make by more conventional means, and are critical components of the air-sea fluxes of heat, water, momentum and gas that drive the interaction of the atmosphere and the ocean. Coupled air-sea models are currently the weakest of the numerical models needed to analyze and forecast environmental (weather) conditions on small, regional and global scales. These modelers have identified the need for data, especially of wind and rain, to develop and verify these models.

## **TRANSITIONS**

The Tactical Oceanography Warfare Support (TOWS) program at NRL has sponsored the development of air-deployable autonomous drifters (Selsor, 1993). Navocean and NOAA are now deploying these sensors on a regular, but limited, basis (about 20 per year). The NOAA National Data Buoy Center is interested in “no-moving-parts” sensors for wind and precipitation. As part of the NOAA Pan-American Climate Studies (PACS) program, ARGs are to be mounted on some of the NOAA Tropical Atmosphere Ocean (TAO) array moorings. It is proposed that the acoustic sensors become a regular component of the NOAA TAO tropical ocean mooring array, and be regularly deployed as part of other large oceanic field experiments.

## **RELATED PROJECTS**

“Acoustical Rainfall Analysis”, sponsored by the Ocean Sciences Division, Physical Oceanography, of the National Science Foundation, broadly overlaps this project. The goal of this NSF project is to develop the acoustical inversion technology to provide a means of making oceanographic rainfall measurements. This project has funded the development of the new generation ARG and their deployment in the western tropical Pacific Ocean.

“Long-term Measurements of Air-Sea Processes: Rainfall, stratiform drizzle, ambient bubbles, and wind speed” is sponsored by the NOAA Pan-American Climate Studies (PACS) program. Its goal is to apply the acoustical weather analysis technology to obtain climatic rainfall data. This project uses the new ARG instruments, which are deployed on the Tropical Ocean Atmosphere (TAO) deep ocean mooring array in the eastern tropical Pacific Ocean as part of the Eastern Pacific Intercomparison of Climate (EPIC) program.

“Validation of Acoustical Rainfall Measurements” is sponsored by the NASA TRMM Program Office. This project focuses on the evaluation of different types of acoustical rainfall measurement algorithms. An emphasis on acoustical classification of rainfall type will use the comparison of weather radar data with the acoustical measurements.

## REFERENCES

- Farmer, D.M. and D.D. Lemon, 1984: The influence of bubbles on the ambient noise in the ocean at high wind speeds. *J. Phys. Oceanogr.* **14**, 1762-1778.
- Lau, K.M., 1998: The South China Sea Monsoon Experiment (SCSMEX). *EOS* **78**, 599, 603.
- Nystuen, J.A., 1996: Acoustical rainfall analysis: Rainfall drop size distribution using the underwater sound field. *J. Acoust. Soc. Am.* **13**, 74-84.
- Nystuen, J.A., 1997: Validation of Acoustic Measurements of Wind and Precipitation using Expendable Ambient Noise Sensor (ANS) Drifters, AN/WSQ-6 (XAN-2). Final Technical Report, Grant #N00014-94-1-G906, Naval Research Laboratory, via Defense Technical Information Center, Alexandria, VA 22304-6145, 21 p.
- Nystuen, J.A., 1999: Relative Performance of Automatic Rain Gauges under Different Rainfall Conditions. *J. Atmos. and Oceanic Tech.*, **16**, 1025-1043.
- Nystuen, J.A., 2001: Listening to Raindrops from Underwater: An Acoustic Disdrometer. *J. Atmos. and Oceanic Tech.* (accepted, in press).
- Nystuen, J.A., C.C. McGlothin and M.S. Cook, 1993: The underwater sound generated by heavy precipitation. *J. Acoust. Soc. Am.* **93**, 3169-3177.
- Nystuen, J.A., M.J. McPhaden and H.P. Freitag, 2000: Surface Measurements of Precipitation from an Ocean Mooring: The Underwater Acoustic Log from the South China Sea", *J. Applied Meteor.* **39**, 2182-2197.
- Nystuen, J.A. and H.D. Selsor, 1997: Weather Classification using Passive Acoustic Drifters. *J. Atmos. and Oceanic Tech.*, **14**, 656-666.
- Selsor, H.D., 1993: Data from the sea: Navy Drifting Buoy Program. *Sea Technology* **34**, 53-58.
- Serra, Y, P.A. Hearn, H.P. Freitag and M.J. McPhaden, 2001: ATLAS self-siphoning rain gauge error estimates. Submitted to *J. Atmos. Ocean. Tech.*
- Vagle, S., W.G. Large and D.M. Farmer, 1990: An evaluation of the WOTAN technique for inferring oceanic wind from underwater sound. *J. Atmos. and Ocean. Tech.* **7**, 576-595.
- Zedel, L., L. Gordon and S. Osterhus, 1999: Ocean Ambient Sound Instrumentation System (OASIS): Acoustic Estimation of Wind Speed and Direction from a Sub-surface Package. *J. Atmos. Oceanic Tech.* **16**, 1118-1126.



## PUBLICATIONS

- Nystuen, J.A., 1997: Validation of Acoustic Measurements of Wind and Precipitation using Expendable Ambient Noise Sensor (ANS) Drifters, AN/WSQ-6 (XAN-2). Final Technical Report, Grant #N00014-94-1-G906, Naval Research Laboratory, via Defense Technical Information Center, Alexandria, VA 22304-6145, 21 p.
- Nystuen, J.A. and H.D. Selsor, 1997: Weather Classification using Passive Acoustic Drifters. *J. Atmos. and Oceanic Tech.*, **14**, 656-666.
- Nystuen, J.A., 1999: Relative Performance of Automatic Rain Gauges under Different Rainfall Conditions. *J. Atmos. and Oceanic Tech.*, **16**, 1025-1043.
- Nystuen, J.A., 1999: Listening to Raindrops, *Solstice* **10**, Number 2, <http://www.csfnct.org/image/solstice/win99/janystuen/listen.html>
- Nystuen, J.A., M.J. McPhaden and H.P. Freitag, 2000: Surface Measurements of Precipitation from an Ocean Mooring: The Underwater Acoustic Log from the South China Sea", *J. Applied Meteor.* **39**, 2182-2197.
- Nystuen, J.A., 2001: Listening to Raindrops from Underwater: An Acoustic Disdrometer. *J. Atmos. and Oceanic Tech.* (accepted, in press).